Advanced Fiber Cement Solutions

ECOBETEK




Ecobetek
宜可倍

- Low maintenance
- Customized color
- Easy to install





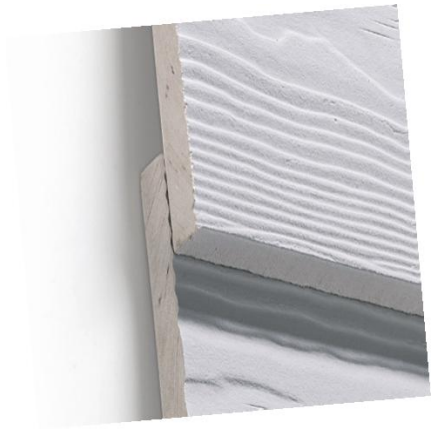



Wood-Grain Fiber Cement Lap Siding


Factory-coated wood-grain fiber cement lap siding in 8 or 12 mm catalogue thicknesses.

Applications: Residential exterior walls. Confirm the board, fixings and system for the project exposure.

Standard length	2440 / 3000 / 3050 mm
Custom length	3600 / 4200 mm
Width	190 / 200 / 210 mm
Thickness	8 / 12 mm
Density	1450 kg/m³





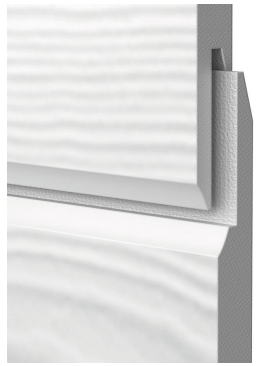



Wood-Grain Click Fiber Cement Cladding

Factory-coated wood-grain fiber cement cladding with a 12 mm tongue-and-groove Click profile.

Applications: Residential exterior walls. Confirm the board, fixings and system for the project exposure.

Standard length	2440 / 3000 / 3050 mm
Custom length	3600 / 4200 mm
Width	190 / 200 / 210 mm
Thickness	12 mm
Density	1450 kg/m³









Smooth Fiber Cement Lap Siding

Smooth, factory-coated fiber cement lap siding with catalogue widths up to 300 mm.

Applications: Residential exterior walls. Confirm the board, fixings and system for the project exposure.

Standard length	2440 / 3000 / 3050 mm
Custom length	3600 / 4200 mm
Width	190 / 200 / 210 / 300 mm
Thickness	8 / 12 mm
Density	1450 kg/m³










Smooth Click Fiber Cement Cladding

Smooth, factory-coated 12 mm fiber cement cladding with an interlocking Click profile.

Applications: Residential exterior walls. Confirm the board, fixings and system for the project exposure.

Standard length	2440 / 3000 / 3050 mm
Custom length	3600 / 3660 mm
Width	190 / 200 / 210 / 300 mm
Thickness	12 mm
Density	1450 kg/m³

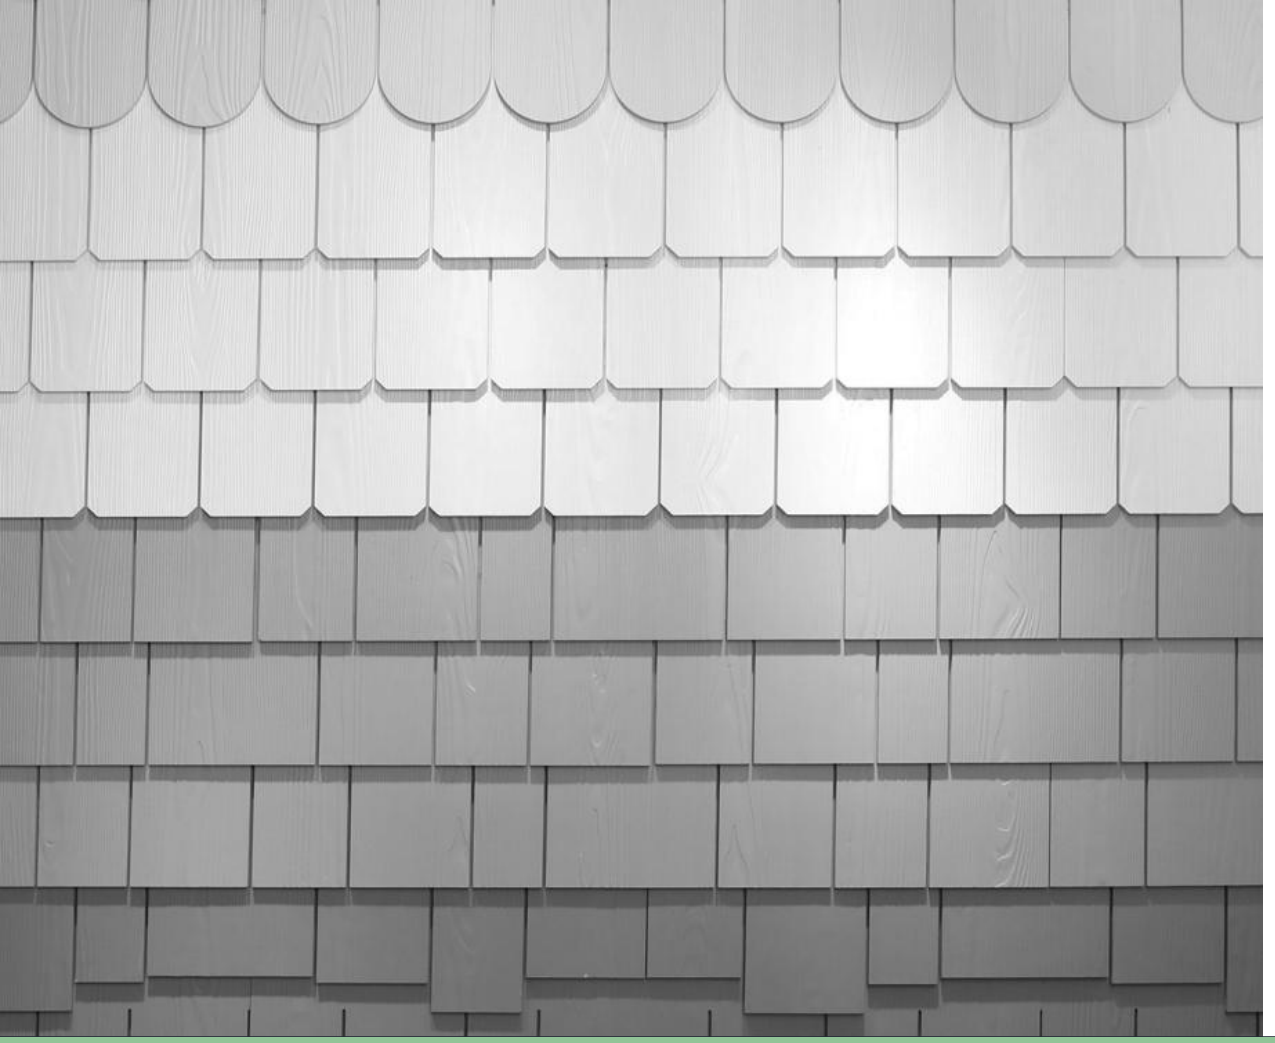



Fiber Cement Shingle Siding

Factory-coated fiber cement shingles with straight, staggered and half-round edge options.

Applications: Exterior gables and accent walls.

Standard length	1220 mm
Custom length	Not listed
Width	400 mm
Thickness	8 / 12 mm
Density	1400 kg/m³





Factory-Coated Fiber Cement Facade Panels

Factory-coated fiber cement facade panels in 6, 8, 9 and 10 mm catalogue thicknesses.

Applications: Exterior facades and interior walls. Coating selection depends on the application.

Standard length	1200 / 2400 / 2440 mm
Custom length	3000 mm
Width	600 / 1200 / 1220 mm
Thickness	6 / 8 / 9 / 10 mm
Density	1200-1250 kg/m^3










Brushed Color-Through Fiber Cement Panels

Through-colored fiber cement facade panels with a directional brushed texture. The board requires no surface painting.


Applications: Exterior facades, commercial buildings and modern accent walls.

Standard length	1200 / 2400 / 2440 mm
Custom length	3000 mm
Width	600 / 1200 / 1220 mm
Thickness	8 / 12 mm
Density	1200-1400 kg/m³



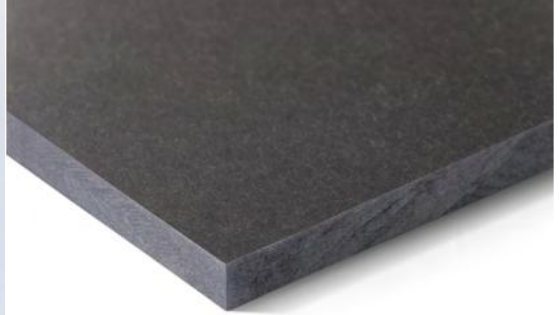



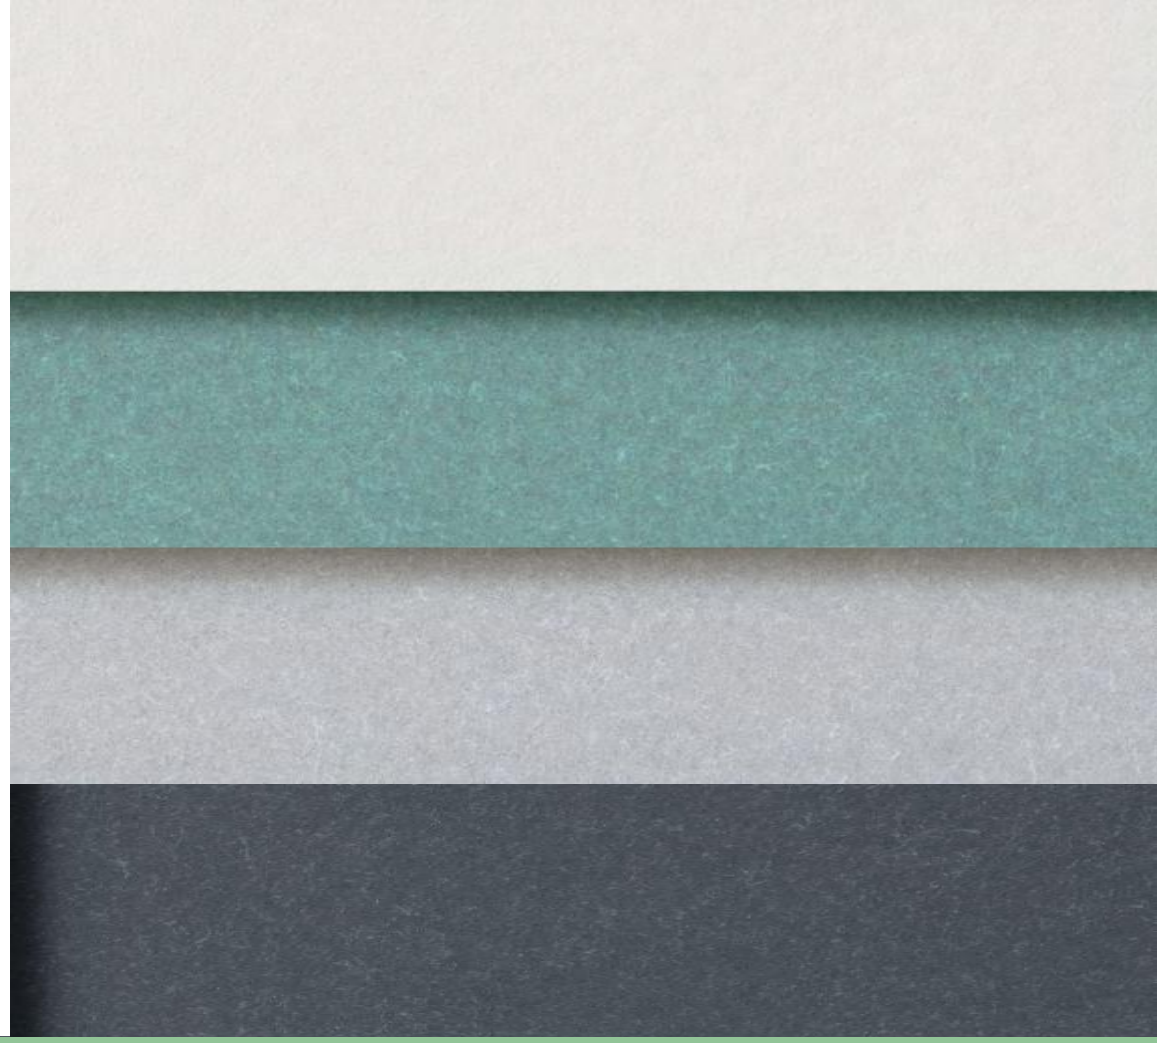

Polished Color-Through Fiber Cement Panels

Through-colored fiber cement panels with a smooth polished finish. The board requires no surface painting.

Applications: Exterior facades, commercial exteriors and interior feature walls.

Standard length	1200 / 2400 / 2440 mm
Custom length	3000 mm
Width	600 / 1200 / 1220 mm
Thickness	8 / 12 mm
Density	1200-1400 kg/m³







Wood-Grain Fiber Cement Decking

Wood-grain fiber cement deck boards with screw-fixed square edges or grooved edges for matching clips.

Applications: Outdoor decks and terraces. Confirm the selected board, support system and exposure requirements before specifying it.

Standard length	2440 mm
Custom length	3000 mm
Width	200 mm
Thickness	20 / 25 mm
Density	1450 kg/m³







Fiber Cement Backer Board

Fiber cement substrate board with catalogue thicknesses from 4 to 25 mm. Confirm suitability for the intended assembly.

Applications: Use in confirmed substrate assemblies. Check wall, ceiling, floor and wet-area requirements for the selected board.

Standard length	2400 / 2440 mm
Custom length	3000 mm
Width	1200 / 1220 mm
Thickness	4-25 mm
Density	1200-1400 kg/m³









Production











Packing



2026
PRODUCTS

Ecobetek
宜可倍

ECOBETEK

CONTACT US

About Ecobetek

For over 15 years, the team behind Ecobetek has been supplying premium fiber cement solutions to the global market. Through our established production network, we have the flexibility to customize board densities, profiles, and sizes based on your exact project needs.

Partnering with us means you get factory-direct pricing along with practical technical support. Ask which product-specific reports are available and confirm their coverage of the selected product, thickness, coating, assembly and destination market.

Email:info@ecobetek.com
Tel/Whatsapp:+8618915440859
www.ecobetek.com